



You Power The Life
www.elerix.com

Technical specification

ELERIX EX-L30 (2C)


Multipurpose LFP Cell

LiFePo4
Lithium Iron Cell

70 / 166

3.2V / 30Ah / 2C

EX-L30

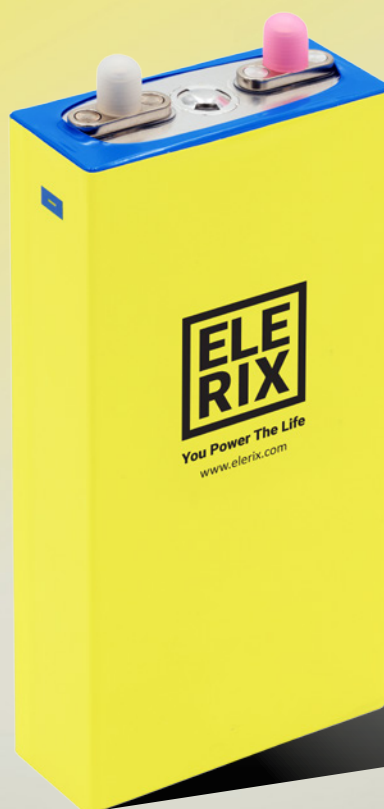

- ▶ Multipurpose Cell - 2C - 60A Discharge
- ▶ Lithium Iron Phosphate - LiFePO4 Chemistry
- ▶ Long Cycle and Calendar Life (3000 cycles / 15 years)
- ▶ Only Plus Temperature Range, No-Frost
- ▶ Superior quality and safety. No toxic chemicals
- ▶ Screw terminals M6

ELERIX EX-L30 (2C)

LiFePO₄, Lithium Iron Cell
3.2V / 30Ah / 2C



ELECTRICAL CHARACTERISTICS

Items			Specification	Remarks
Product code			ELERIX EX-L30 (2C)	
Nominal Voltage (V)			3.2	
Nominal Capacity (Ah)			30	Charge @0.5C Discharge @0.5C
Nominal Energy (Wh)			96	
Form Factor			70 / 166	
Terminal type			Screw Terminal M6	Max Torque 6 N/m
Terminal material			Alu (-) / Alu (+)	
Cell Dimension (mm)	Width		70	
	Height		166	Without terminals
	Thick		27	
Cell Volume (dm³ - L)			0.31	
Nominal Weigth (kg)			0.69	Average value
Energy Density	Gravity (Wh/kg)		139	
	Volume (Wh/L)		306	
Internal Resistance mOhm (Max)			3	
Voltage	Minimal (V)		2.5	
	Maximal (V)		3.65	
Current	Charge	Standard (A)	15	
		Max. Cont. (A)	30	
	Discharge	Standard (A)	15	
		Max. Cont. (A)	60	continued, temp ≤ 50°C
		Peak (A)	90	≤ 30 sec, temp ≤ 50°C
ESS Cycle Life (60% DOD)			3000	@0.3C/@0.3C, @25°C, >60% SOH
Cycle Life (80% DOD)			2000	@0.3C/1C, @25°C, >80% SOH
Operating Lifespan (Calendar Life)			15 years	Avarage material aging estimation
Operating Temperature	Charge (°C)		0 ≈ +50 °C	Recommended temperature: +25°C Maximal temperature for permanent operation: +45°C
	Discharge (°C)		0 ≈ +50 °C	
	Storage (°C)		-20 ≈ +50 °C	

KEY SAFETY FEATURES

Items	Specification
Fire	No Self-ignition, No Explosion.
Overcharge	No Explosion. No Fire.
Short-circuit	No Explosion. No Fire.
Penetration	Smoke only. No Fire.
Crush	Smoke only. No Fire.
Overheating	Stable up to +130°C. No fire.
Non-toxic	No Cobalt, No Lead-Acid.
Recycling	+90% Recyclable.

Rev. 10/2024

Are you interested in more details?
Visit our online presentation.



ELERIX.com >